

# MX100S Standard Edition

## 3-in-1 thin client kit for affordable desktop computing

*The NComputing MX100S provides a high performance, low cost computing solution for a simple, powerful & affordable desktop computing alternative.*

### Key Features & Benefits

- Each MX100 kit includes 3 client devices (primary and two satellites)
- Share one computer with up to 45 users
- Powered by Numo SoC
- USB 2.0 keyboard and mouse
- USB 2.0 peripheral support
- Microphone & audio out
- Energy-efficient (typically 2W/user)
- Slash acquisition cost by as much as 65%, maintenance cost by 80% and energy cost by 90%.
- Powerful vSpace® Server desktop virtualization software included
- Easy to set up, maintain, manage and secure
- Compact and reliable (no fans or disks)
- Managed by integrated vSpace management software

As the industry’s premier 3-in-1 thin client offering, each MX100S Standard Edition kit works with NComputing’s vSpace Server software to deliver a high quality, media-rich Windows desktop experience to 3-users. Architected as an end-to-end solution and built to be simple to deploy, operate and maintain, the hardware, software and protocol components work seamlessly to provide the best user experience. Multiple MX100S Standard Edition kits and a single vSpace Server can deliver Windows desktops for up to 45-users at fraction of the cost of PCs and typical thin-clients. Users don’t even know they are sharing a single computer and the whole solution can be managed by users with only basic IT computer skills.

Ideal for workgroup computing, classrooms, computer labs, training rooms, libraries and small business, the MX100S Standard Edition, delivers innovation combined and incredible value to customers with a simple, powerful and highly affordable desktop computing solution.

The MX100S: Standard edition (3-users kit) comes bundled with NComputing vSpace Server licenses.

Multiple MX100S kits can be deployed on an existing LAN infrastructure to deliver Windows desktops to up to 45 users from a single vSpace Server.

Benefit from superior multimedia capabilities, USB peripheral support and the highest number of users per host computer—all at a very affordable price. The economics improve even more with:


- vSpace® Server’s ability to deliver Windows desktops to multiple users from a single computer.
- With a single power adapter and network cable for all three, cables are reduced by one-third

MX100 rewrites new affordability standards in shared computing by slashing acquisition cost by as much as 65%, maintenance cost by 80% and energy cost by 90%.



### MX100S: Standard edition

Connect to up to 45 users to a single vSpace Server anywhere on LAN.

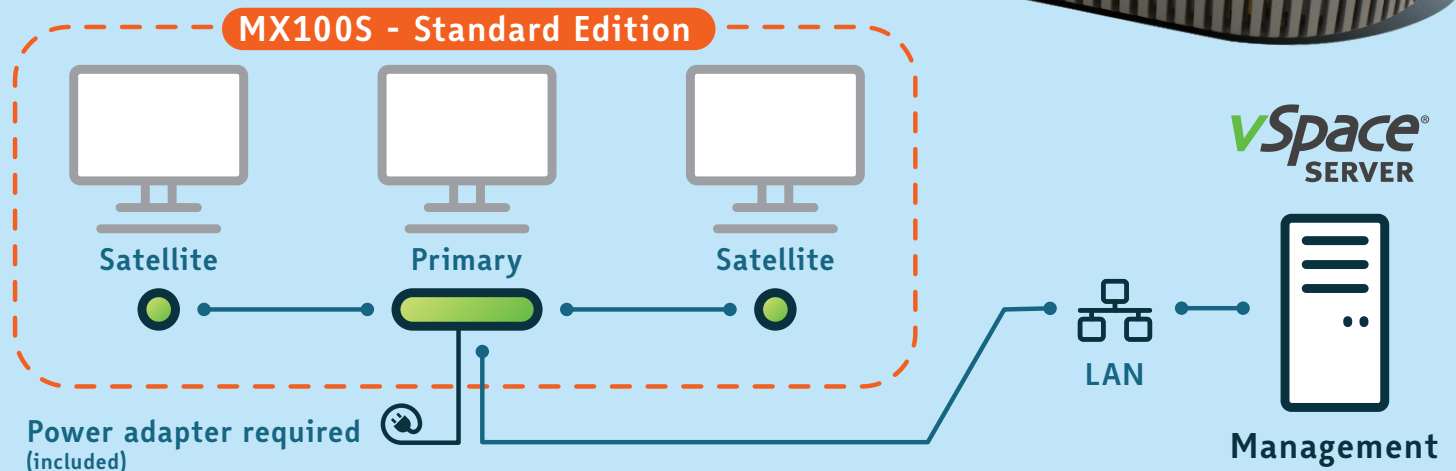

## Included:

- 1X primary device
- 2x satellite devices
- Power supply with power cord
- 3x monitor mount brackets
- 2x 6-foot satellite link cables (USB Type-A to USB Type-B)
- Quick install guide
- vSpace Server installation rights.

FEATURES	DESCRIPTION
<b>UP TO 45 USERS PER HOST</b>	Fewer PC's to manage and lower annual operating costs
<b>HIGH QUALITY GRAPHICS</b>	Second generation NUMO SoC device provides full screen video streaming up to 1920x1080 resolution
<b>VSPACE SERVER</b>	Simple to install, easy to configure and fast to set up (complimentary licenses included)
<b>CENTRALIZED MANAGEMENT</b>	Save time deploying and managing multiple vSpace Servers and client devices
<b>SERVICE AND SUPPORT</b>	Provides the resources you need to maximize your technology investment and improve system uptime
<b>SUPPORTED OPERATING SYSTEMS</b>	Microsoft Windows *** — Refer to the support section at <a href="http://ncomputing.com/support">ncomputing.com/support</a> for the latest supported versions.
<b>PC HOST REQUIREMENTS</b>	See recommended hardware configuration guide at <a href="http://ncomputing.com/support">ncomputing.com/support</a>
<b>MAX USERS PER VSPACE SERVER</b>	45

HARDWARE SPECIFICATIONS	DESCRIPTION
<b>PROCESSOR</b>	Second generation Numo® 2 SoC provides full screen video streaming
<b>SIZE</b>	Primary client 270mm (w) x 80mm (d) x 35mm (h) Satellite client 75mm (w) x 75mm (d) x 25mm (h)
<b>VIDEO RESOLUTION</b>	800x600, 1024x768, 1280x800, 1280x1024, 1360x768, 1440x900, 1920x1080*
<b>AUDIO</b>	16-BIT Stereo DAC via standard 3.5mm speaker port
<b>MICROPHONE</b>	16-BIT MONO microphone audio input via standard 3.5mm microphone port
<b>MOUSE &amp; KEYBOARD</b>	Support for USB 2.0 mouse and keyboard devices (HID devices)
<b>NETWORK</b>	10/100/1000 Mb/s Ethernet speed support (100Mb/s speed or higher preferred)
<b>USB 2.0</b>	Primary client 3 x USB 2.0 ports for peripheral & keyboard/mouse Satellite client 3 x USB 2.0 ports for peripheral & keyboard/mouse
<b>WEIGHT</b>	Primary client 0.24 kg / 0.53 lbs Satellite client 0.06 kg / 0.13 lbs
<b>KIT SHIPPING WEIGHT</b>	1.06KG / 2.34 LBS (includes 3 client devices, power adapter, documentation, 3 VESA mount plates and 2 USB A-B cables)
<b>POWER</b>	Input: 100-240 VAC, 50-60 Hz; Output: 12 VDC, 1.5 A; Nominal power consumption: ~6 W (without peripheral USB devices)
<b>FRONT LED INDICATORS</b>	Primary client Power LED - Blue when power supply is ok LAN LED - Solid blue when connected to LAN; blinking when communicating Satellite client Status LED - Solid blue when connected to primary client
<b>SATELLITE LINK CABLES</b>	USB 2.0 Printer cable between the primary client and each of the satellite clients (2x 2 meter USB A-B cable included)
<b>INTERNAL HW</b>	NComputing Numo2 System-on-Chip; Solid-state design, no moving parts, no fans, no local user storage; Embedded NComputing firmware (no local user OS)
<b>RELIABILITY</b>	Reliability (MTBF) >250,000 hours (calculated using Bellcore Issue 6 TR-332, Case 2, Part I at 40°C)
<b>CERTIFICATIONS</b>	FCC Class A, CE, KCC and RoHS compliant

## Connections

1. Headphones (audio-out)
2. USB 2.0
3. Microphone (analog-in)
4. Satellite 3 link
5. Satellite 3 VGA
6. DC Power
7. RJ45 - LAN
8. Primary VGA
9. Primary Keyboard & Mouse
10. Satellite 2 VGA
11. Satellite 2 link
12. Mouse
13. Link to Primary
14. Keyboard



\* Fully supported in Q3, 2016